

I'm not robot!

Saving after Checking Scan Results

You can check the scan results, then save the images to a computer.

Important


- You cannot check the scan results before saving when scanned using **Auto scan** or the operation panel.

Note

- The screens for scanning photos are used as examples in the following descriptions.


1. Start **IJ Scan Utility**.

2. Click **Settings...**

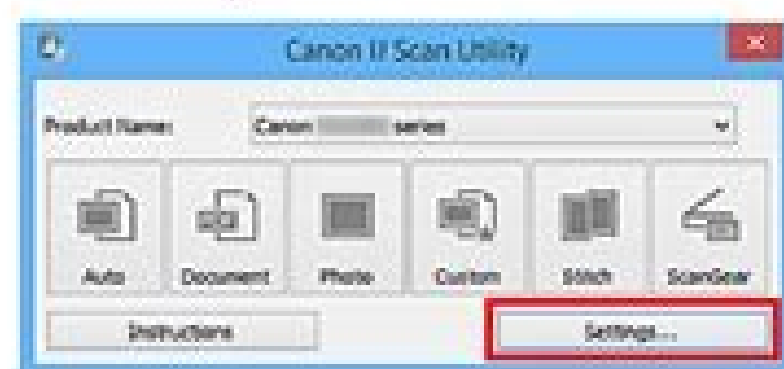

The **Settings dialog box** appears.

3. Click **Photo Scan**.

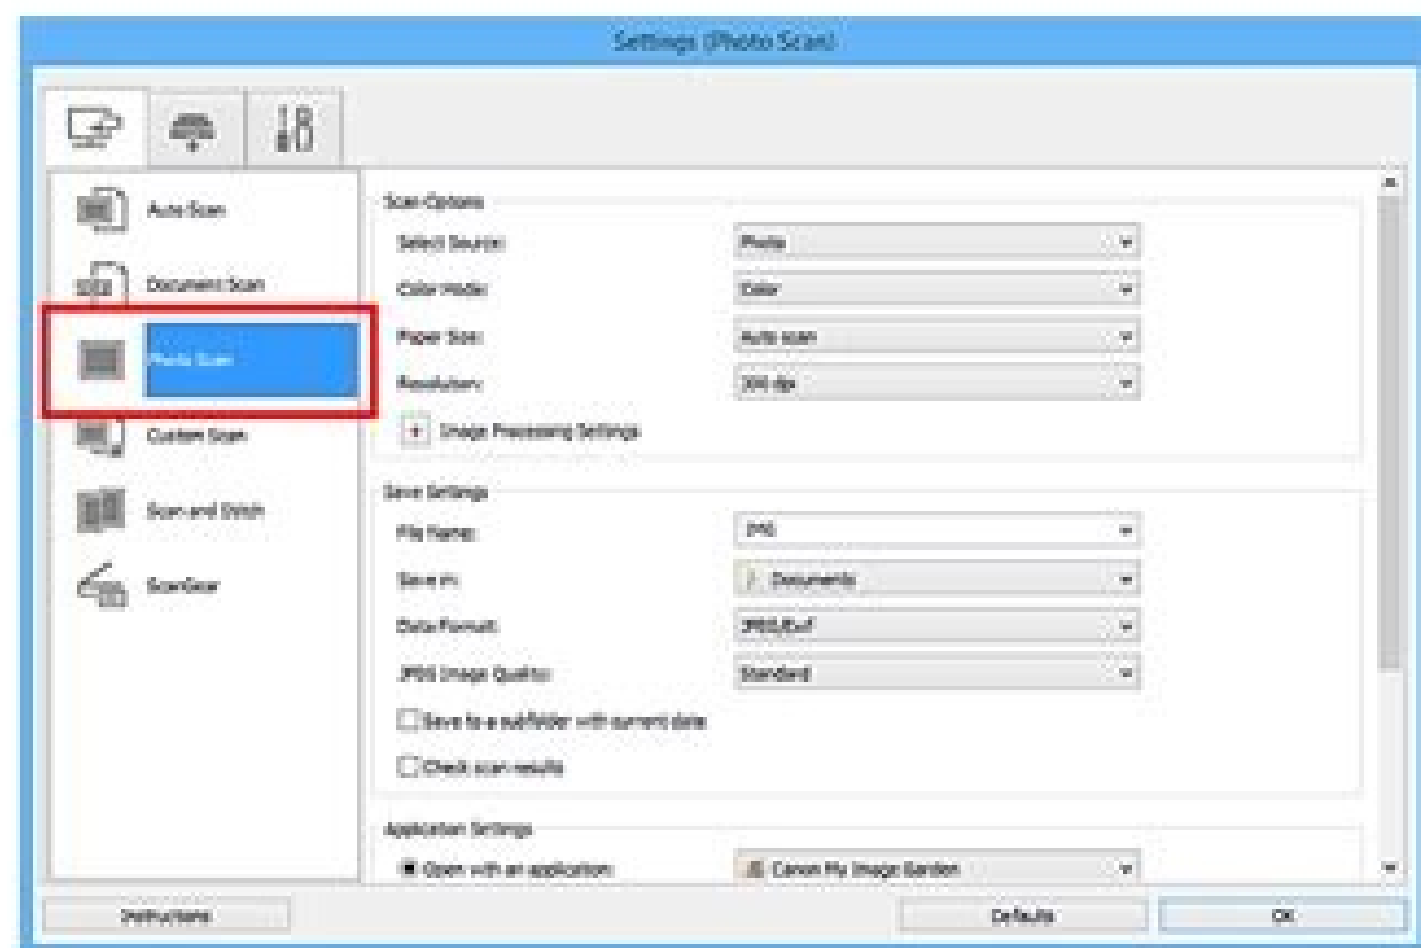


4. Select the **Check scan results** checkbox, then click **OK**.

www.userMANUALS.tech

- select **Photo** for **Document type** and specify **Auto scan(A) -Single** for **Scan size** to scan one original

- Scan one printed photo, postcard, business card, or disc with a software application on a computer

Place the original **WITH THE SIDE TO SCAN FACING DOWN**, with 0.4 inch (1 cm) or more space between the edges (diagonally striped area) of the platen glass. Portions placed on the diagonally striped area cannot be scanned.

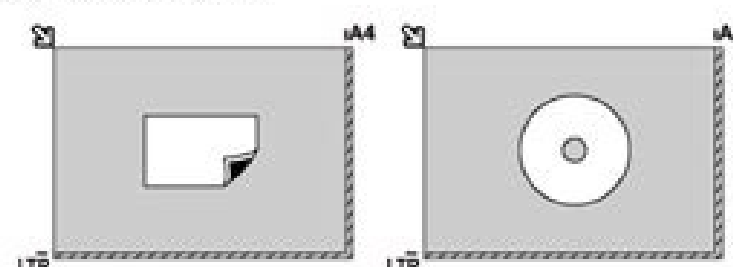


Loading Two or More Originals on the platen glass

- In the scan mode,
 - select **Auto scan** for **Document type** to scan two or more printed photos, postcards, or business cards
 - select **Photo** for **Document type** and specify **Auto scan(A) -Multi** for **Scan size** to scan two or more originals
- Scan two or more printed photos, postcards, or business cards with a software application on a computer

Place the originals **WITH THE SIDE TO SCAN FACING DOWN**. Allow 0.4 inch (1 cm) or more space between the edges (diagonally striped area) of the platen glass and the originals, and between the originals. Portions placed on the diagonally striped area cannot be scanned.

You can place up to 12 items.

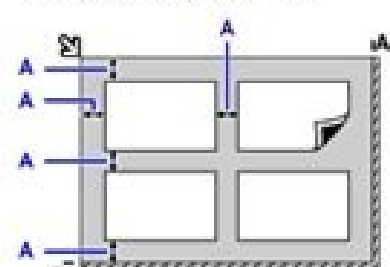

A: More than 0.4 inch (1 cm)

Note

- The **Skew Correction** function automatically compensates for the originals placed at an angle of up to approximately 10 degrees. Slanted photos with a long edge of 7.1 inches (180 mm) or more cannot be corrected.
- Non-rectangular or irregular shaped photos (such as cut out photos) may not be scanned properly.

www.userMANUALS.tech

Sending Faxes Using the Operation Panel of the Machine

- ▶ Sending Faxes by Entering Fax/Telephone Number **#Basic**
- ▶ Resending Faxes (Redialing a Busy Number)
- ▶ Setting Items for Sending Faxes
- ▶ Sending Faxes Using Useful Functions

www.userMANUALS.tech



